

APPLICATION MANUAL

White LED Driver IC
Step-up DC-DC Converter IC
TK11880F

CONTENTS

1 . DESCRIPTION	2
2 . FEATURES	2
3 . APPLICATIONS	2
4 . TYPICAL APPLICATION	2
5 . PIN CONFIGURATION	3
6 . BLOCK DIAGRAM	3
7 . ABSOLUTE MAXIMUM RATINGS	4
8 . ELECTRICAL CHARACTERISTICS	4
9 . TEST CIRCUIT	6
10 . TYPICAL CHARACTERISTICS	7
11 . PIN DESCRIPTION	10
12 . CIRCUIT DESCRIPTION	11
13 . APPLICATIONS INFORMATION	14
14 . PACKAGE DESCRIPTION	16
12 . NOTES	17
13 . OFFICES	17



White LED Driver / Step-up DC-DC Converter IC TK11880F

1. DESCRIPTION

The TK11880F is a step-up DC-DC converter designed for White LED driver applications, using constant frequency PWM architecture, with the following built in: a very high current switching transistor (0.6A peak), a high speed oscillator (1.0MHz), a switch over current detector, a low voltage reference ($V_{Ref}=0.495V$), an error amplifier, a PWM comparator, a zener diode for open-circuit protection and ON/OFF control.

TK11880F can drive up to six White LEDs in series. This IC works with a very wide operation supply range (2.65V~10V) and the adjustable output voltage can be set as high as 24.5V. The white LEDs are connected in series and driven at a constant current, resulting in uniform brightness and high efficiency. The reference voltage is a very low 0.495V, achieving high efficiency operation with the constant current output. The ON/OFF control is built-in and the circuit current can be decreased when the EN pin is low (shutdown mode). The built-in zener diode can be used for open-circuit protection in case the output load is disconnected, such as the string of LEDs opened. The internal zener diode reduces the external component count.

The TK11880F can also be used in other applications as a step-up DC-DC converter.

The TK11880F is available in the SON3024-8 surface mount package.

2. FEATURES


- Very Wide Operating Voltage Range (2.65V to 10V)
- 1.0MHz Operation
- Internal Switching Transistor
- Maximum Duty Cycle 93%
- 24.5V_{MAX} Output
- Very Small Inductor Available
- Very Small Package SON3024-8

3. APPLICATIONS

- LED Backlighting and Frontlighting
- Step-up DC-DC Converters

4. TYPICAL APPLICATION

APPLICATION CIRCUIT (6LEDs in Series)

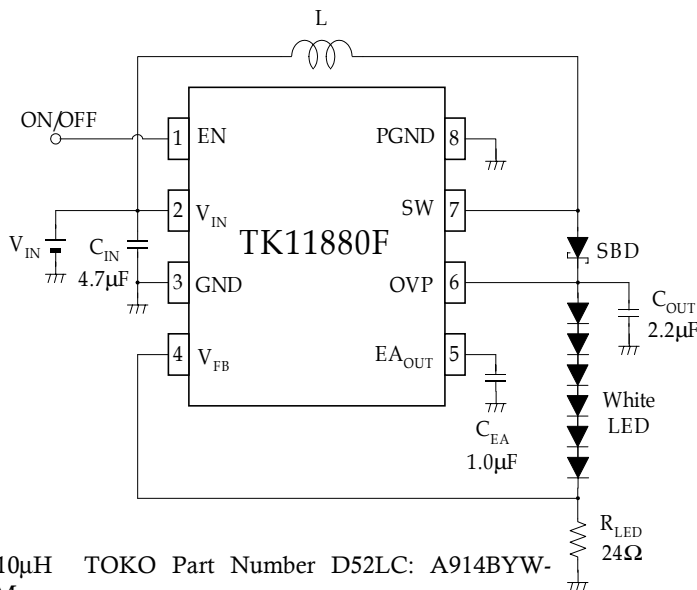


L: 10µH TOKO Part Number D52LC: A914BYW-100M

15µH


DB318C: A997AS-150M

10µH

D3313FB: 1036FB-100M

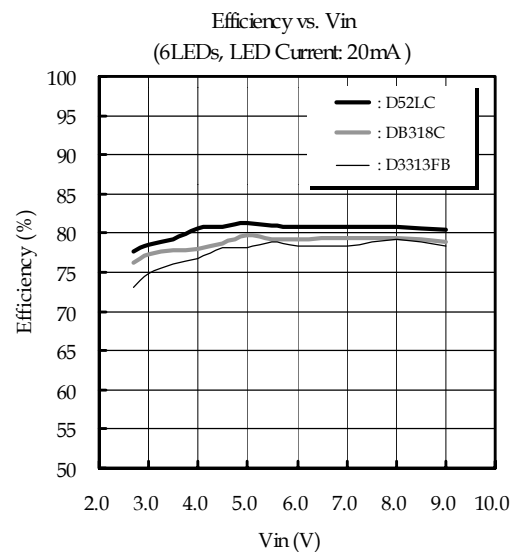


5. PIN CONFIGURATION

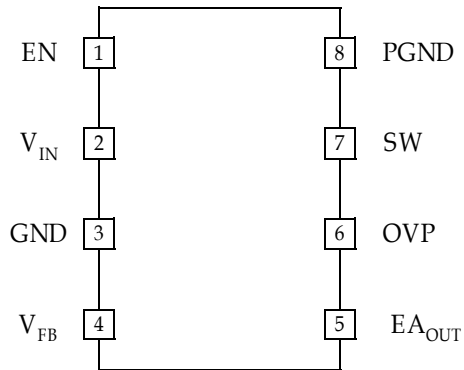

Pin No.	Symbol	Function
1	EN	Enable (ON/OFF) Input.
2	V _{IN}	Power Supply Voltage Input.
3	GND	Ground.
4	V _{FB}	Feedback Voltage.
5	EA _{OUT}	Error Amplifier Output.
6	OVP	Open-Circuit Protection.
7	SW	Switch. (Connect inductor and diode here.)
8	PGND	Power Ground.

6. BLOCK DIAGRAM

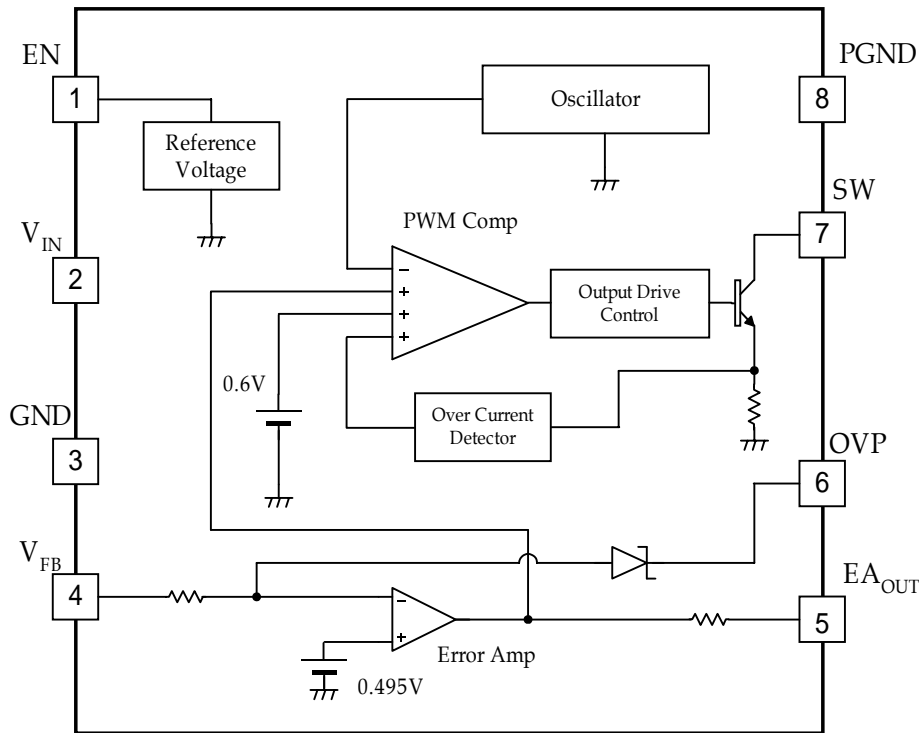

7. ABSOLUTE MAXIMUM RATINGS

$T_A=25^\circ\text{C}$

Parameter	Symbol	Rating		Unit s	Conditions
		MIN	MAX		
Absolute Maximum Ratings					
Supply Voltage	V_{IN}	-	15	V	
Switch Voltage	$V_{SW\ MAX}$	-	29	V	
Switch Peak Current	$I_{SW\ PEAK\ MAX}$	-	2.0	A	
Power Dissipation	P_D	-	600	mW	*
Storage Temperature Range	T_{STG}	-55	+150	$^\circ\text{C}$	
Operating Conditions					
Operating Temperature Range	T_{OP}	-30	85	$^\circ\text{C}$	
Operating Voltage Range	V_{OP}	2.65	10	V	
Phase Compensation Capacitance (Pin 5)	C_{EA}	1.0	-	μF	
Output Voltage	V_{OUT}	-	24.5	V	

* P_D must be decreased at the rate of $4.8\text{mW}/^\circ\text{C}$ for operation above 25°C on TK11880F's evaluation board.

8. ELECTRICAL CHARACTERISTICS


$V_{IN}=3\text{V}, T_A=25^\circ\text{C}$

Parameter	Symbol	Value			Units	Conditions
		MIN	TYP	MAX		
Oscillator Section						
Operating Frequency	f	0.7	1.0	1.3	MHz	
Error Amplifier Section (V_{FB} Pin, EA_{OUT} Pin)						
Threshold Voltage	V_{EA}	475	495	515	mV	
Input Bias Current	I_{EAIN}	-1.0	-0.2	1.0	μA	$V_{FB}=0\text{V}$
Voltage Gain	A_V	-	40	-	dB	
Gain Band Width	GBW	-	2	-	MHz	$A_V=0\text{dB}$
Output High Voltage	$V_{EAOUT,HIGH}$	0.78	0.87	-	V	$V_{FB}=0\text{V}$
Output Low Voltage	$V_{EAOUT,LOW}$	-	0.05	0.2	V	$V_{FB}=1.0\text{V}$
Output Source Current	$I_{EAOUT,SOURCE}$	-	-36	-21	μA	$V_{EAOUT}=0.45\text{V}$
Output Sink Current	$I_{EAOUT,SINK}$	21	36	-	μA	$V_{EAOUT}=0.45\text{V}$
Dead Time Control Section						
Maximum Duty Cycle	D_{MAX}	88	93	-	%	$V_{FB}=0\text{V}$
Shutdown Section (EN Pin)						
EN Input Voltage +	$V_{EN,HIGH}$	1.2	-	20	V	On mode
EN Input Voltage -	$V_{EN,LOW}$	0	-	0.3	V	Shutdown mode

$V_{IN}=3V, T_A=25^{\circ}C$


Parameter	Symbol	Value			Units	Conditions
		MIN	TYP	MAX		
EN Pin Input Bias Current	I_{ENIN}	-	25	55	μA	$V_{EN}=3V$
Output Switch Section (SW Pin)						
Switch Current Limit	$I_{SW,LIMIT}$	0.6	1.3	1.8	A	
Switch Saturation Voltage	$V_{SW,SAT}$	-	0.12	0.2	V	$I_{SW}=200mA$
Switch Leakage Current	$I_{SW,OFF}$	-	0.01	2.0	μA	$V_{FB}=1V, V_{SW}=24.5V$
Open-Circuit Protection Section (OVP Pin)						
Open-Circuit Voltage	V_{OVP}	25.0	26.6	28.6	V	$I_z=0.6mA$
V_{IN} Section (V_{IN} Pin)						
Low Voltage Stop	$V_{IN,LOW}$	2.20	2.45	2.65	V	
Quiescent Supply Current	$I_{IN,ON}$	2.4	3.9	5.4	mA	$V_{FB}=1V$
Shutdown Supply Current	$I_{IN,OFF}$	-	0.01	1.0	μA	$V_{EN}=0V$

9. TEST CIRCUIT

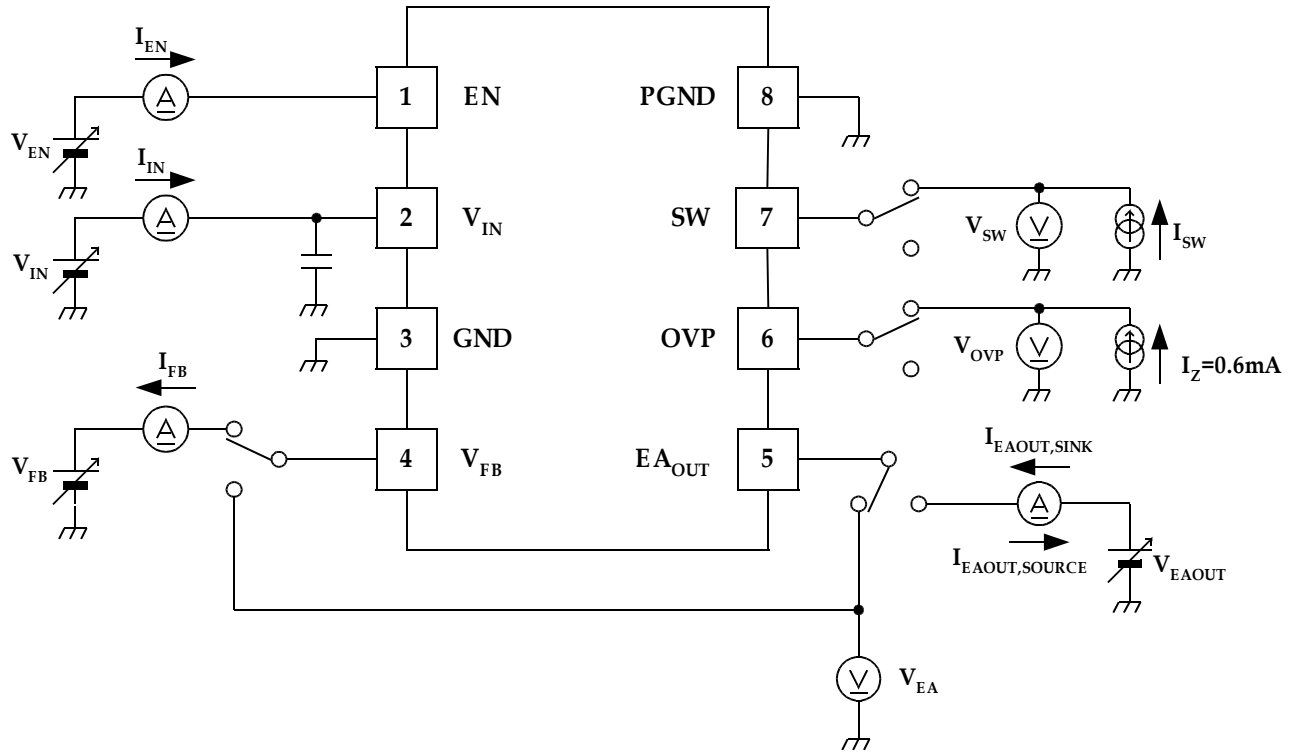


10. TYPICAL CHARACTERISTICS


- Quiescent Supply Current vs. Supply Voltage
 $V_{IN}=V_{EN}, V_{FB}=1V$

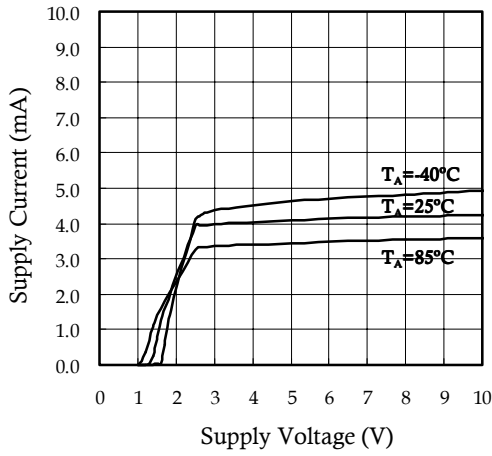


- Shutdown Supply Current vs. Supply Voltage
 $T_A=25^\circ C, V_{EN}=0V$

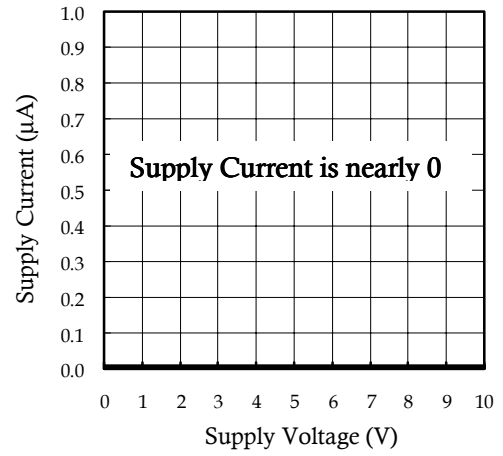


- Reference Voltage vs. Supply Voltage
 $V_{IN}=V_{EN}, V_{FB}=V_{EAOUT}, T_A=25^\circ C$

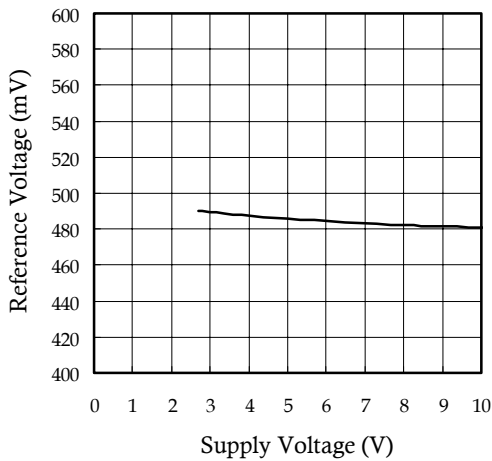


- Reference Voltage vs. Temperature
 $V_{IN}=V_{EN}=3V, V_{FB}=V_{EAOUT}$

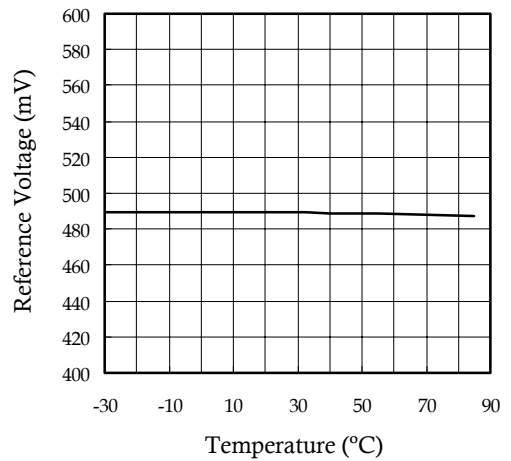


- OSC Frequency vs. Supply Voltage
 $V_{EN}=3V, V_{FB}=0V, I_{SW}=10mA, T_A=25^\circ C$

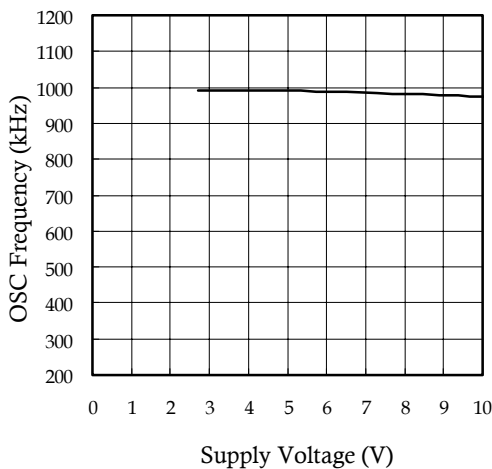


- OSC Frequency vs. Temperature
 $V_{IN}=V_{EN}=3V, V_{FB}=0V, I_{SW}=10mA$

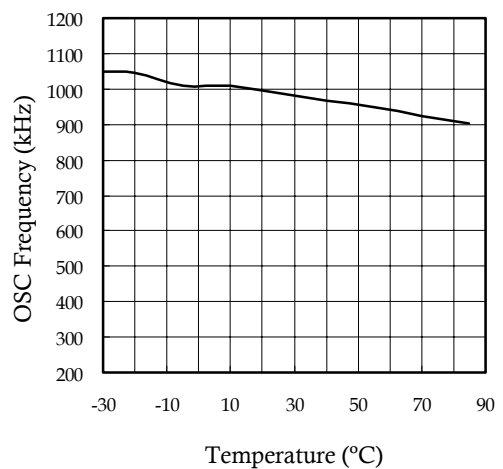


- Maximum Duty vs. Temperature
 $V_{IN}=V_{EN}=3V, V_{FB}=0V, I_{SW}=10mA$

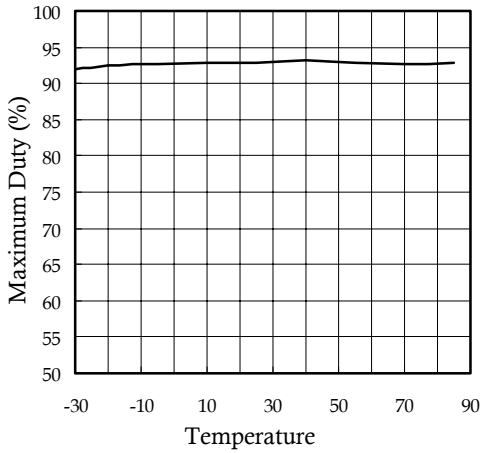


- Switch Saturation Voltage vs. Switch Current
 $V_{IN}=V_{EN}=3V, V_{FB}=0V, T_A=25°C$

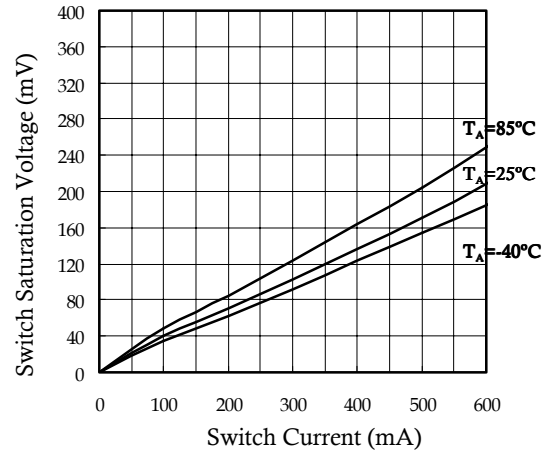


- Supply Current vs. EN Input Voltage
 $V_{IN}=3V, V_{FB}=1V$

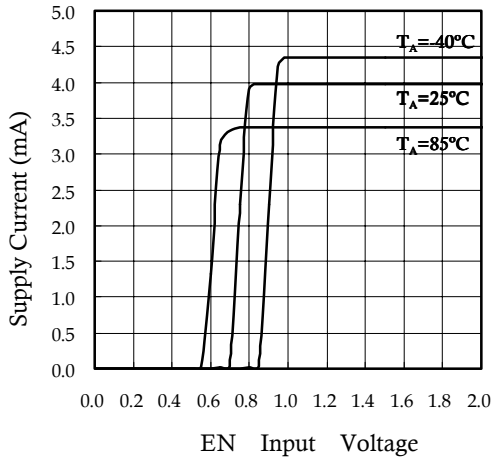


- En Input Bias Current vs. EN Input Voltage
 $V_{IN}=3V$

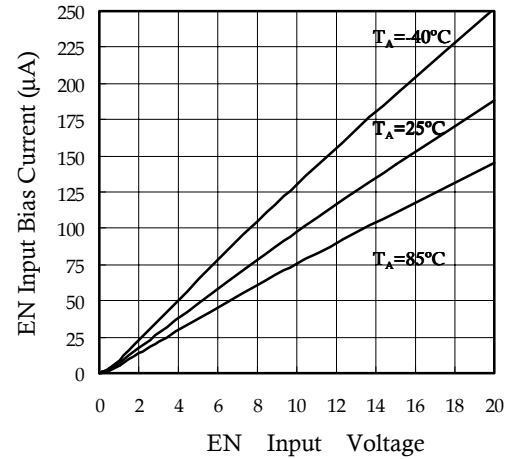


- Switch Current Limit vs. Supply Voltage
 $V_{IN}=V_{EN}, V_{FB}=0V, T_A=25°C$

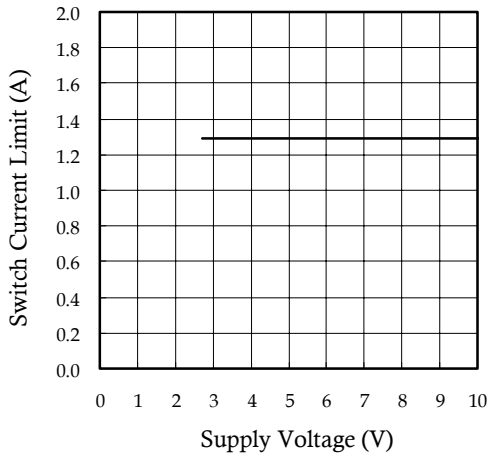


- Switch Current Limit vs. Temperature
 $V_{IN}=V_{EN}=3V, V_{FB}=0V$

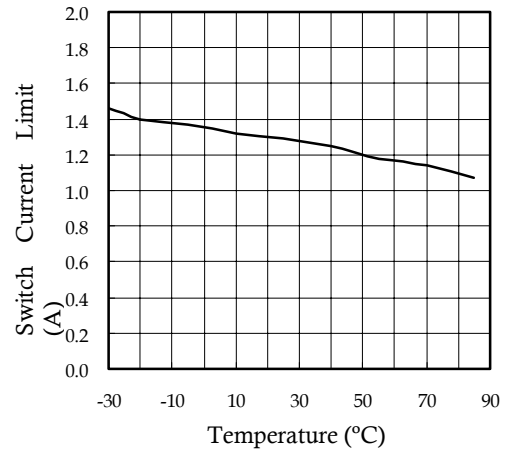

- Zener Diode Current vs. Open-Circuit Voltage
 $V_{IN}=3V, V_{EN}=0.3V, V_{FB}=0V, T_A=25^\circ C$

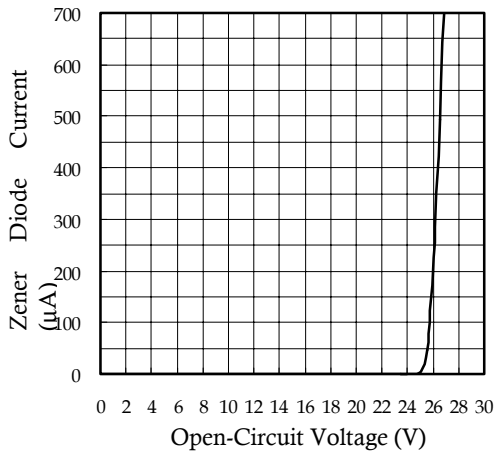

- Open-Circuit Voltage vs. Temperature
 $V_{IN}=3V, V_{EN}=0.3V, V_{FB}=0V, I_Z=0.6mA$

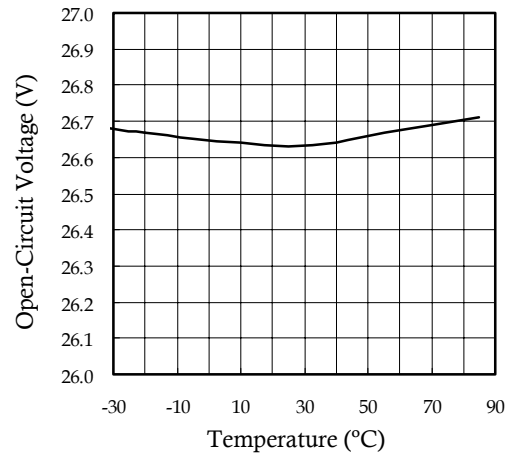

11. PIN DESCRIPTION

No.	Symbol	Internal Equivalent Circuit	Description
1	EN		<p>This is the chip-enable input with a built-in 200kΩ pull-down resistor. Set the EN-pin higher than 1.2V to enable the device. Set the EN-pin below 0.3V to disable the device. The EN pin can be pulled up to 20V, regardless of the supply voltage and output voltage.</p>
2	V _{IN}		<p>Power supply voltage input. When the supply voltage falls below 2.45V (V_{IN,LOW}), the TK11880F stops switching operation to avoid malfunction.</p>
3	GND	—	Ground.
4	V _{FB}		<p>Error amplifier inverting input. Feed back input. The error amplifier detects the output voltage of the DC-DC converter and outputs the PWM control signal. Threshold voltage is 0.495V</p>
6	OVP		<p>This pin will work as open-circuit protection. Connect OVP to Output (V_{OUT}) to avoid generating high voltage at the switch pin during open-circuit conditions. The Open-Circuit Voltage is approximately 26.6V.</p>
5	EA _{OUT}		<p>Error amplifier output. Compensation pin. A capacitor combination connected to this pin provides compensation for the control loop. A capacitor C_{EA} recommends 1.0μF or more.</p>
7	SW		<p>This pin is the collector of the internal 26.6V NPN power switch. The switch transistor has a maximum 0.6A peak current capability.</p>
8	PGND	—	Power Ground.

12. CIRCUIT DESCRIPTION

12.1 PWM Comparator

The voltage comparator has one inverting and three non-inverting inputs. The comparator is a voltage-pulse width

converter that controls the ON time of the output pulse depending on the input voltage. The output level is high when the sawtooth wave is lower than the error amplifier output voltage, current sense comparator output voltage, and idle period setting voltage.

Maximum duty cycle, which is a maximum ON time of output pulse, is decided by a idle period setting voltage. The maximum duty cycle is set to 93% including circuit delay and Turn-off delay of Switching Transistor.

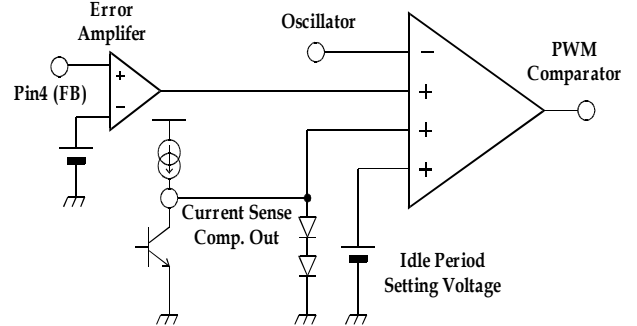


Fig.1: Internal equivalent circuit of PWM Comparator

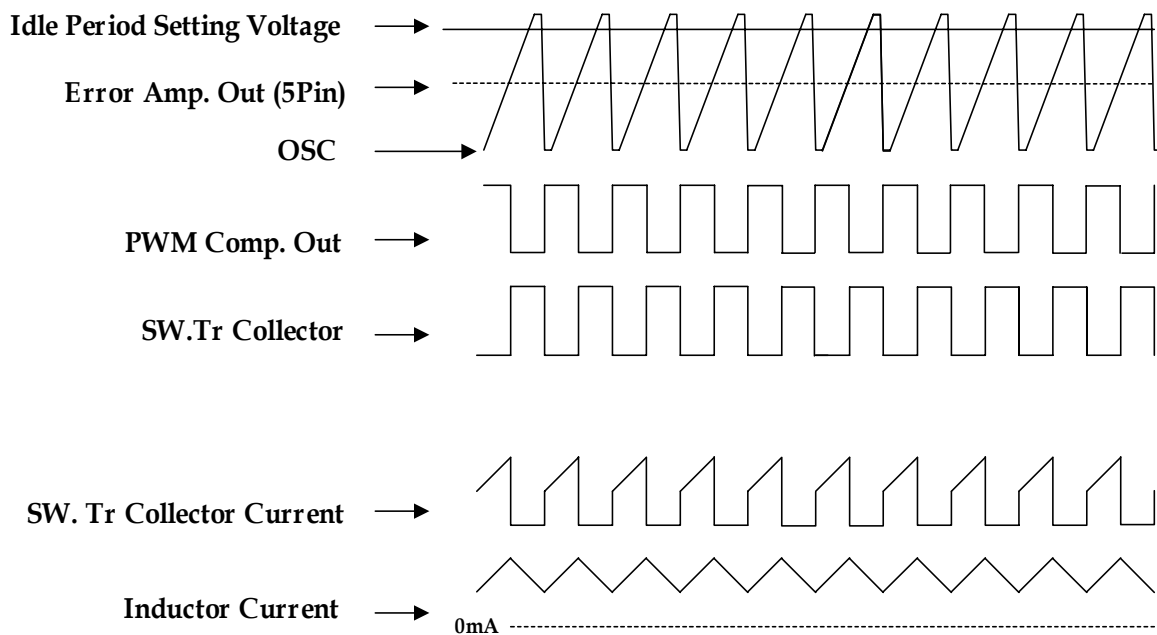


Fig.2: Timing Diagram of PWM Comparator

12.2 Error Amplifier

The error amplifier detects the output voltage of the DC-DC converter and outputs the PWM control signal. The voltage gain is fixed, and connecting a phase compensation capacitor C_{EA} to the EA_{OUT} pin (Pin 5) provides stable phase compensation for the system. Moreover, Soft start operation is set by C_{EA} . Soft start prevents a inrush current at power-up. C_{EA} recommends 1.0 μ F or more.

Reference Voltage ($V_{EA}=0.495V$) divided from the Band gap voltage is supplied to the inverting input of the error amplifier.

This architecture allows the series-connected white LEDs to be driven with a constant current. The LED current (I_{LED}) is set by an external resistor (R_{LED}) connected between the FB pin and GND (see Fig.3). The current of each LED is

$$I_{LED} = \frac{V_{EA}}{R_{LED}} \tag{1}$$

Where V_{EA} : Error amplifier threshold voltage 0.495V

Output voltage V_{OUT} is given by

$$V_{OUT} = n \cdot V_F + V_{EA} \tag{2}$$

Where V_F : LED forward voltage drop
 n : Number of LEDs connected in series

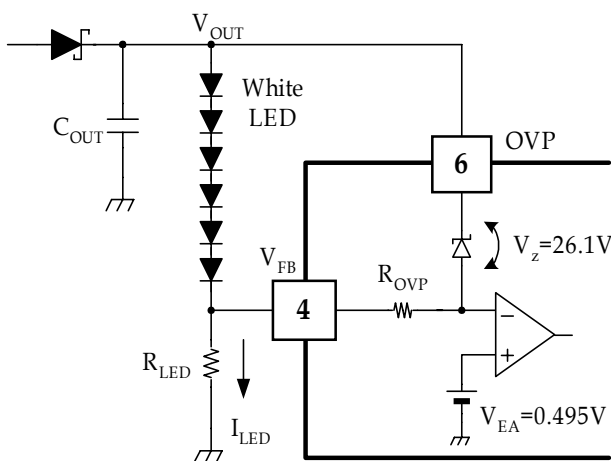


Fig3: Setting constant current through LED

To obtain a regulated output voltage for most common step-up regulator applications, connect a voltage divider from the output (V_{OUT}) to FB (see Fig.4). The regulated output voltage is determined by

$$V_{OUT} = V_{EA} \left(1 + \frac{R2}{R1} \right) \tag{3}$$

V_{OUT} can be set from V_{IN} to 24.5V, (Note that maximum V_{OUT} is limited to an internal open-circuit protection voltage 25.0V.)

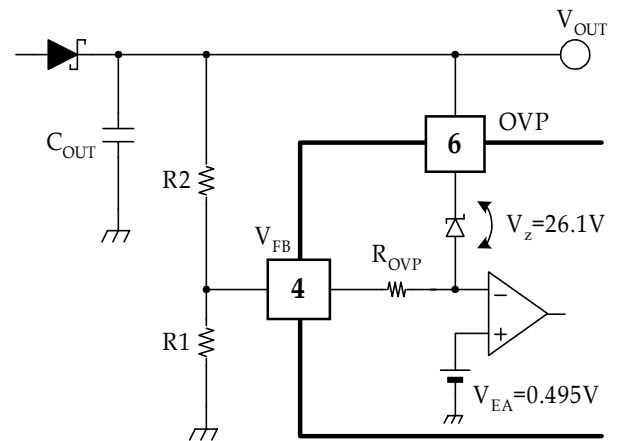


Fig.4: Setting Output voltage

12.3 Operating supply voltage range

When the supply voltage falls below 2.45V ($V_{IN,LOW}$), the TK11880F stops switching operation to avoid malfunction.

The recommended operating voltage range of this IC is 2.65V~10V. However, the maximum rating for the supply voltage is as high as 15V.

12.4. EN(ON/OFF)

Set the EN pin higher than 1.2V to enable the device. Set it below 0.3V to disable the device; that is, shutdown mode. During shutdown, the supply current drops to 1μA or less. The internal 200kΩ pull-down resistor ensures the shutdown mode when the EN pin remains open. The EN pin can be pulled up to 20V, regardless of the supply voltage and output voltage.

The relationship between control current (I_{EN}) and EN pin voltage (V_{EN}) is

$$I_{EN} = \frac{V_{EN}}{R_{DOWN}} + \frac{V_{EN} - V_{BE}}{R_{EN}} \tag{4}$$

Where $R_{DOWN}=R_{EN}=200k\Omega$, $R_{ENOUT}=0\Omega$

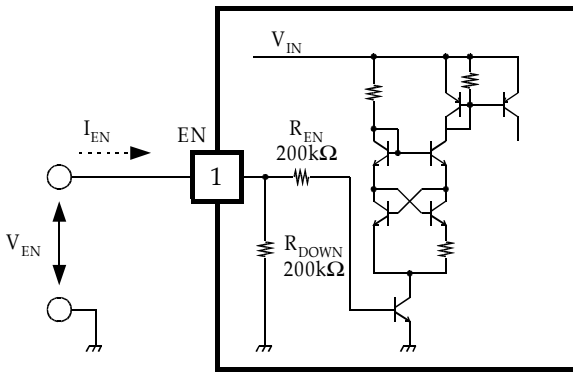


Fig.5: Internal equivalent circuit of EN Pin

If the voltage applied to the EN pin is too high, put R_{ENOUT} in series with the EN pin to reduce its bias current.

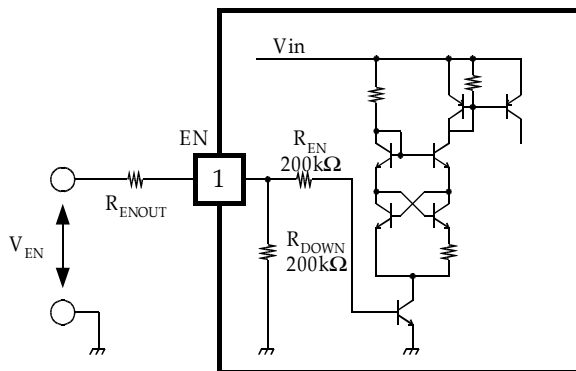


Fig.6: R_{ENOUT} with the EN pin

12.5 Open-Circuit Protection

The TK11880F has internal open-circuit protection. When the main feedback loop is opened, the internal zener diode will work as another path of the feedback loop. This prevents the switch node from generating high voltage. The voltage level at V_{OUT} is clamped at

$$V_{OUT} = V_{OVP} = V_Z + V_{REF} = 26.6V$$

Where $V_Z=26.1V$ zener voltage
 $V_{EA}=0.495V$ Error amplifier threshold voltage.

During open-circuit, the current, I_Z of the zener diode is

$$I_Z = \frac{V_{EA}}{R_{OVP} + R_{LED}} \approx \frac{V_{EA}}{R_{OVP}} < 0.6mA \tag{5}$$

Where $R_{OVP}=800\Omega$, $R_{OVP} \gg R_{LED}$

The clamped level of V_{OUT} is enough to drive 6 white LEDs connected in series.

13. APPLICATIONS INFORMATION

13-1 APPLICATION CIRCUIT (5LEDs in Series)

L : 10 μ H Type D52LC TOKO Part Number: A914BYW-100M
 15 μ H Type DB318C TOKO Part Number: A997AS-150M
 10 μ H Type D3313FB TOKO Part Number: 1036FB-100M



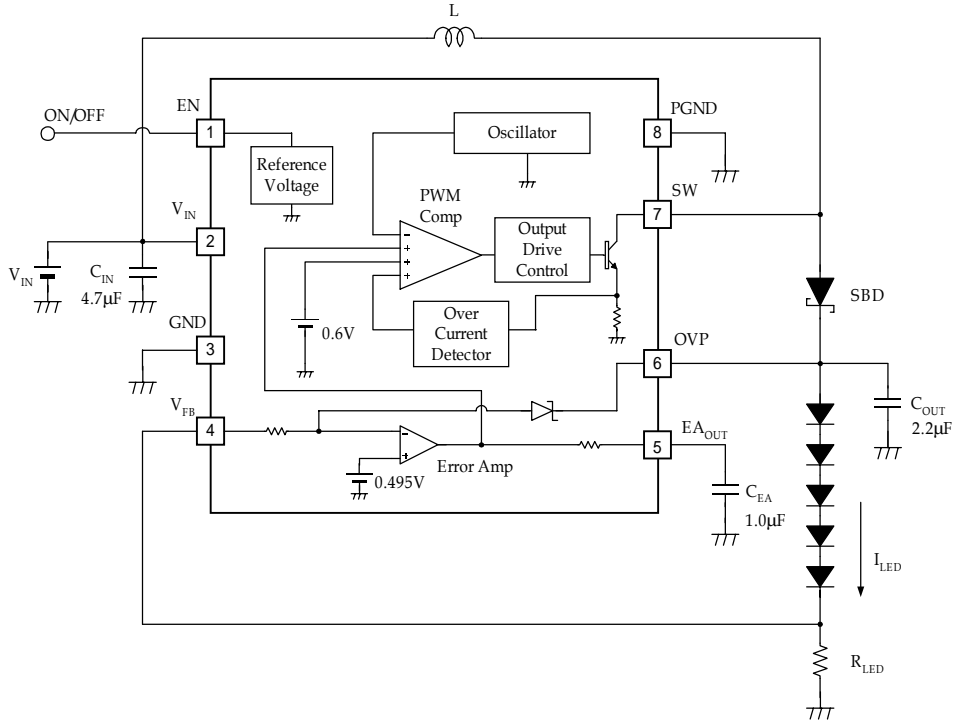


Fig.7: Typical 5 LEDs Application

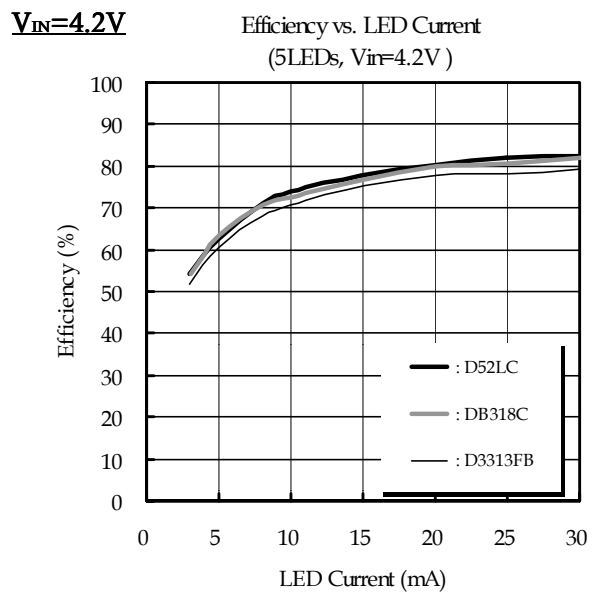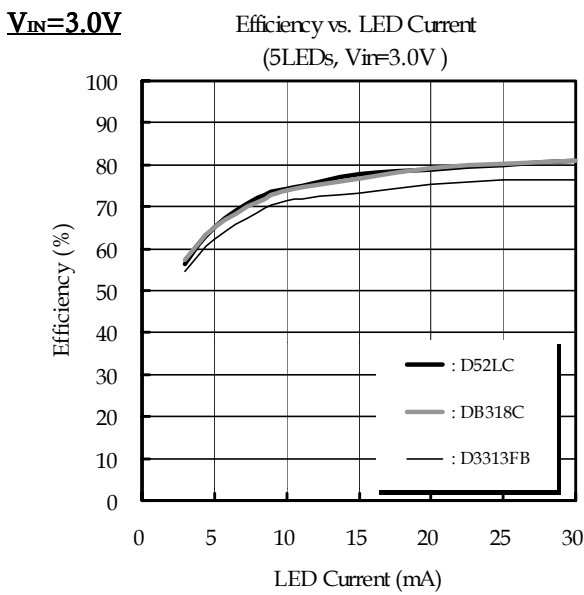

13-2 APPLICATION CIRCUIT (6LEDs in Series)

L : 10 μ H Type D52LC TOKO Part Number: A914BYW-100M
 15 μ H Type DB318C TOKO Part Number: A997AS-150M
 10 μ H Type D3313FB TOKO Part Number: 1036FB-100M




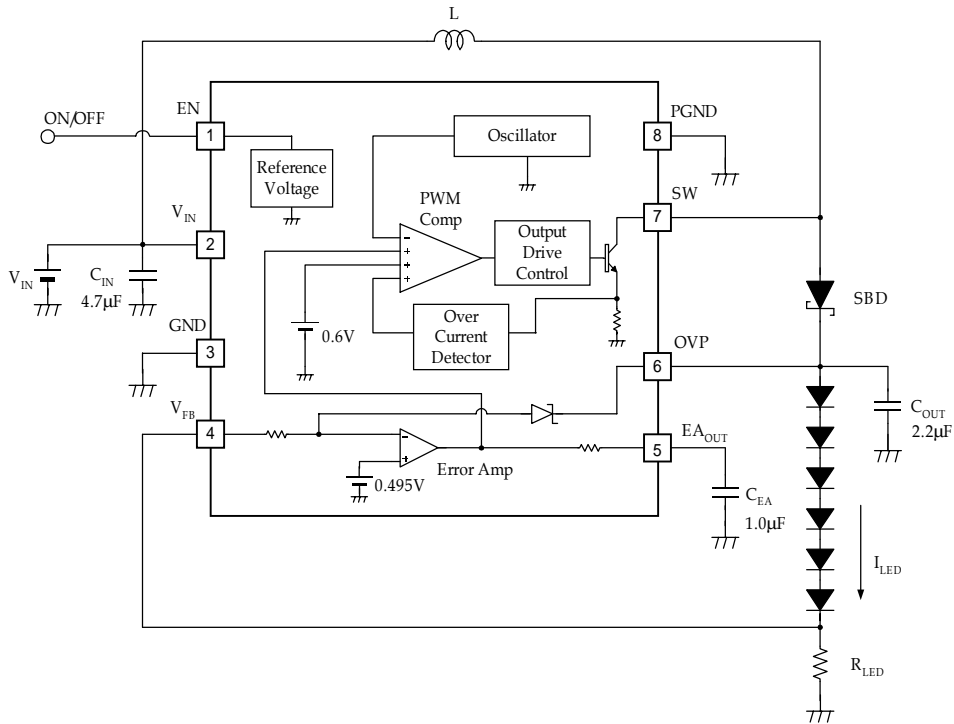


Fig.8: Typical 6 LEDs Application

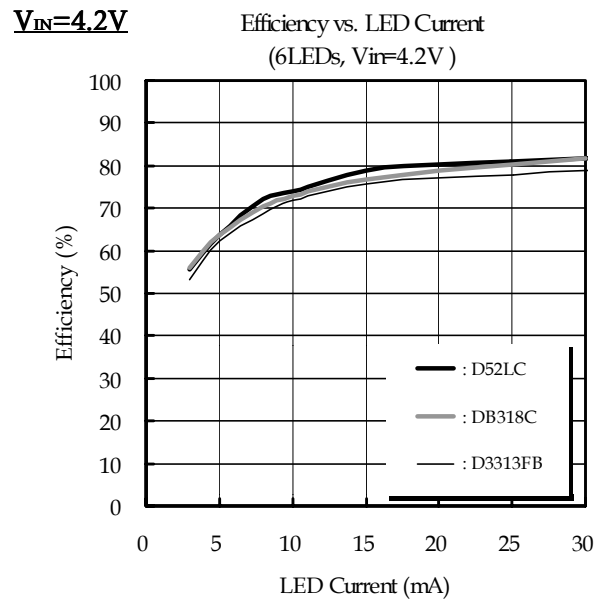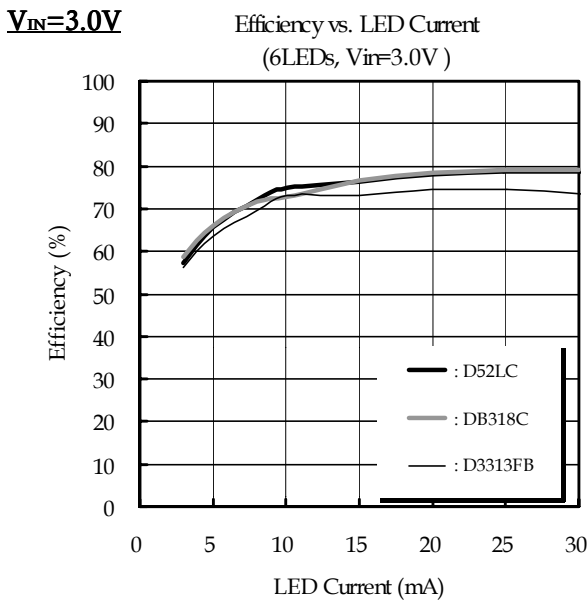

14. PACKAGE DESCRIPTION

Package : SON3024-8

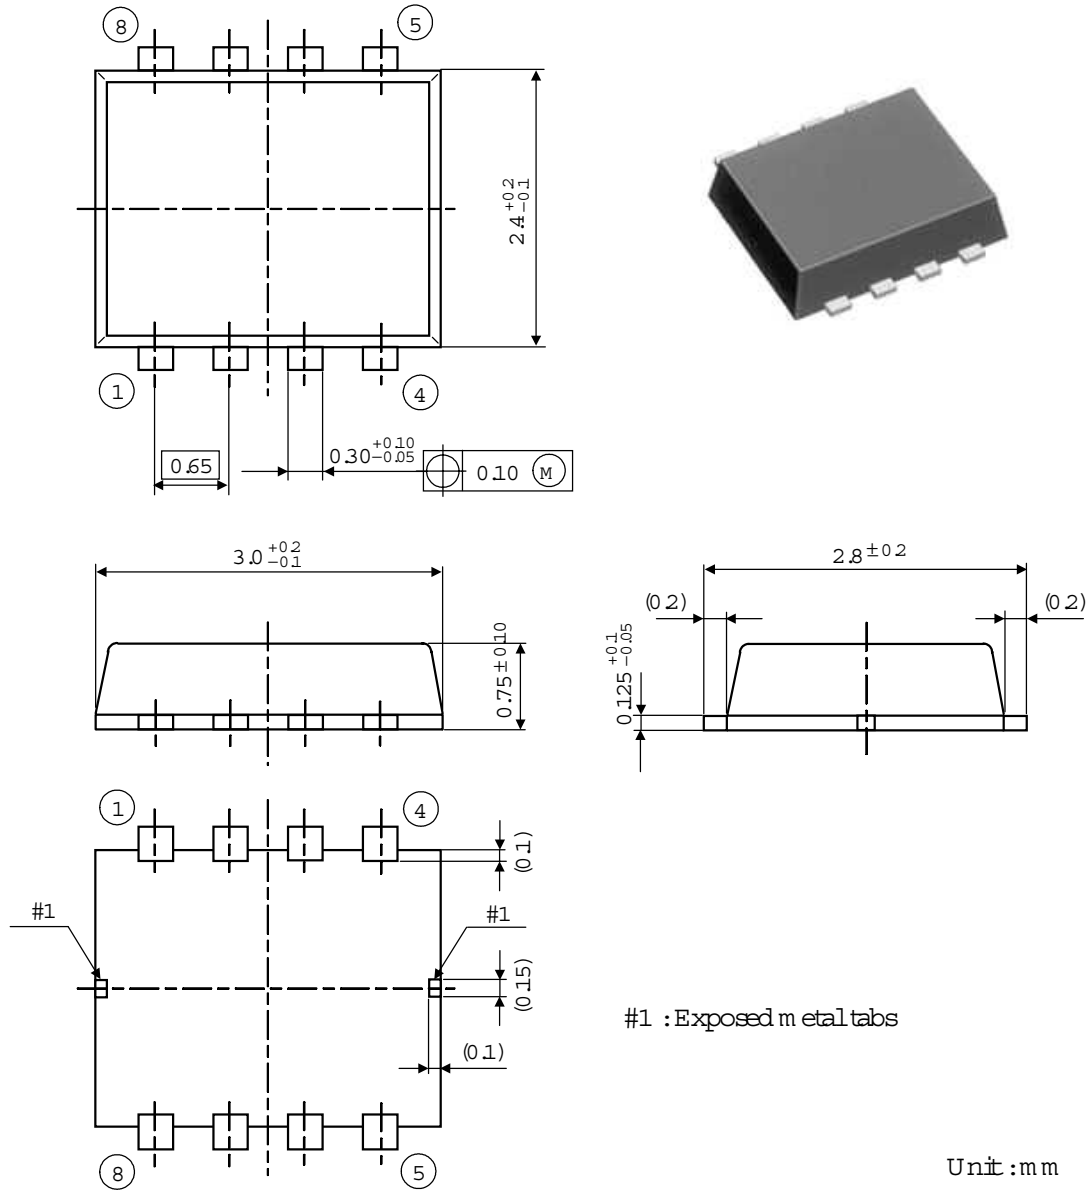

12. NOTES

- Please be sure that you carefully discuss your planned purchase with our office if you intend to use the products in this application manual under conditions where particularly extreme standards of reliability are required, or if you intend to use products for applications other than those listed in this application manual.
 - Power drive products for automobile, ship or aircraft transport systems; steering and navigation systems, emergency signal communications systems, and any system other than those mentioned above which include electronic sensors, measuring, or display devices, and which could cause major damage to life, limb or property if misused or failure to function.
 - Medical devices for measuring blood pressure, pulse, etc., treatment units such as coronary pacemakers and heat treatment units, and devices such as artificial organs and artificial limb systems which augment physiological functions.
 - Electrical instruments, equipment or systems used in disaster or crime prevention.
- Semiconductors, by nature, may fail or malfunction in spite of our devotion to improve product quality and reliability. We urge you to take every possible precaution against physical injuries, fire or other damages which may cause failure of our semiconductor products by taking appropriate measures, including a reasonable safety margin, malfunction preventive practices and fire-proofing when designing your products.
- This application manual is effective from May.2004. Note that the contents are subject to change or discontinuation without notice. When placing orders, please confirm specifications and delivery condition in writing.
- TOKO is not responsible for any problems nor for any infringement of third party patents or any other intellectual property rights that may arise from the use or method of use of the products listed in this application manual. Moreover, this application manual does not signify that TOKO agrees implicitly or explicitly to license any patent rights or other intellectual property rights which it holds.
- None of the ozone depleting substances(ODS) under the Montreal Protocol are used in our manufacturing process.

13. OFFICES

If you need more information on this product and other TOKO products, please contact us.

- TOKO Inc. Headquarters
1-17, Higashi-yukigaya 2-chome, Ohta-ku, Tokyo, 145-8585, Japan
TEL: +81.3.3727.1161
FAX: +81.3.3727.1176 or +81.3.3727.1169
Web site: <http://www.toko.co.jp/>
- TOKO America
Web site: <http://www.toko.com/>
- TOKO Europe
Web site: <http://www.tokoeurope.com/>
- TOKO Hong Kong
Web site: <http://www.toko.com.hk/>
- TOKO Taiwan
Web site: <http://www.tokohc.com.tw/>
- TOKO Singapore
Web site: <http://www.toko.com.sg/>
- TOKO Seoul
Web site: <http://www.toko.co.kr/>
- TOKO Manila
Web site: <http://www.toko.com.ph/>
- TOKO Brazil
Web site: <http://www.toko.com.br/>



Semiconductor Division

YOUR DISTRIBUTOR