


# Toko Standard PCB

(Reference only)

Toko P/No. : TDFM1B-2639S-10A

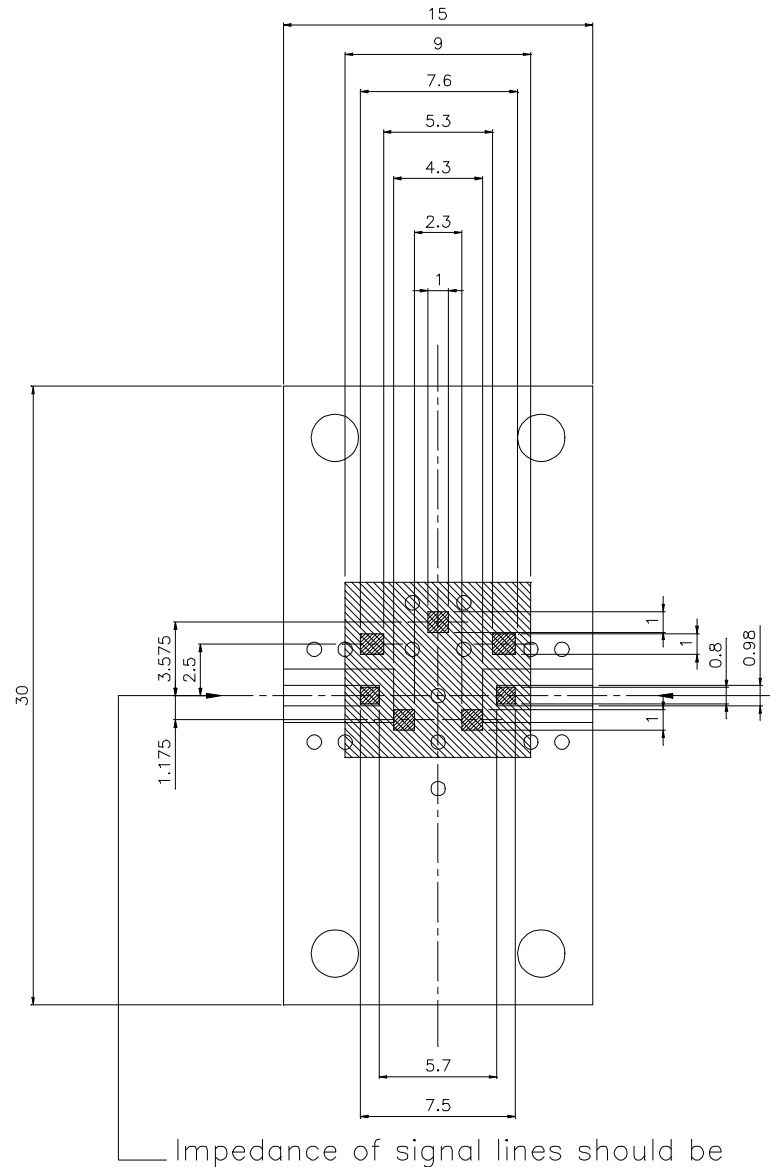

Impedance of signal lines should be 50  $\Omega$  including land pattern.

 Soldering Parts

 Solder Resist

Back plane is all coppered.

All holes are plated-through hole.

## Substrate Material:

^ BT Resin CCL-H870 t=0.4mm.

CCL-H870's typical dielectric constant is 3.6 at 1GHz.



Toko,INC.

081126