


Toko Standard PCB

(Reference only)

No. : TDFM3B-2593X-10A-01

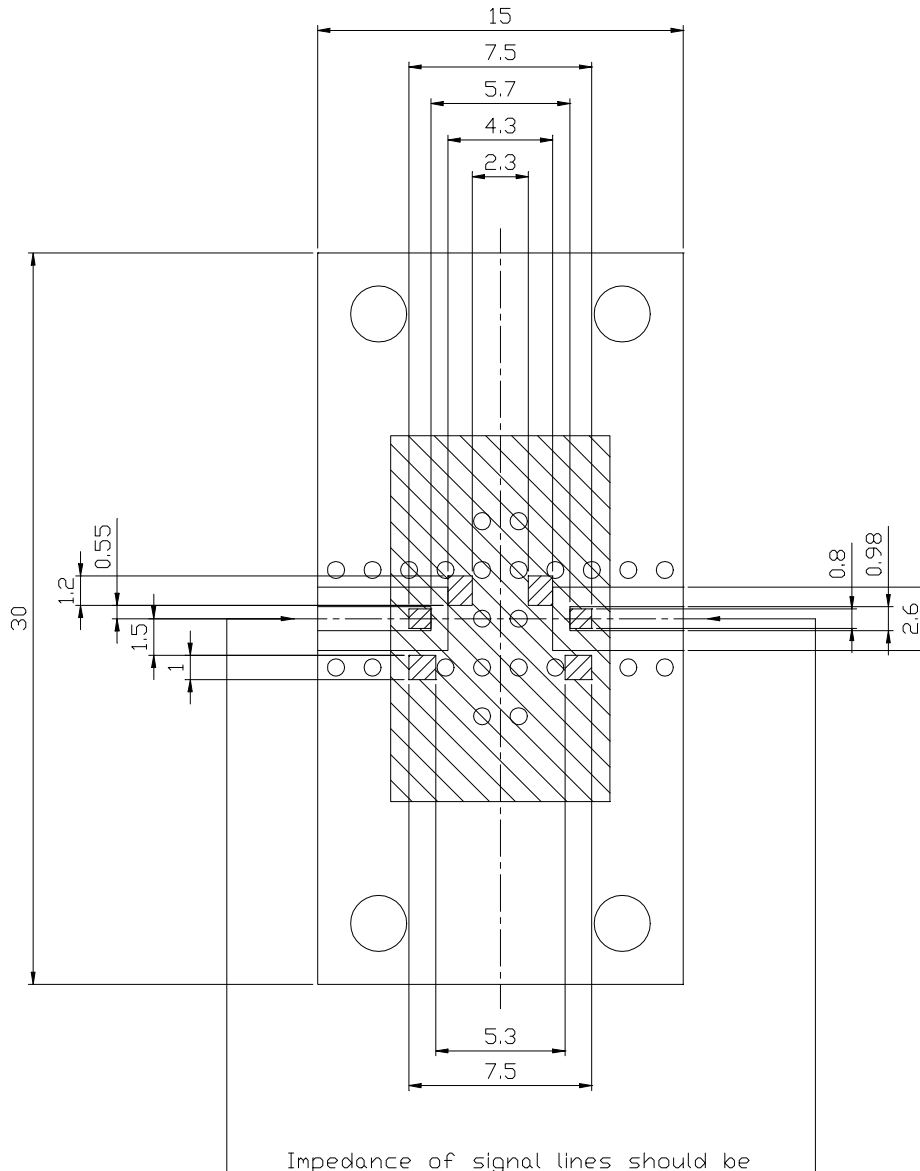

Impedance of signal lines should be 50 ohms including land pattern.

- ▨ Soldering parts
- ▨ Solder Resist

Back plane is all coppered.
All holes are plated-through hole.

Substrate Material:

BT Resin CCL-H870 t=0.4mm.

CCL-H870's typical dielectric constant is 3.6 at 1GHz.



Toko,INC.