


Specification of Dielectric Filter

(Preliminary)

Toko P/No. : TDFM3B-2593X-10A-01

1.Outline Dimension

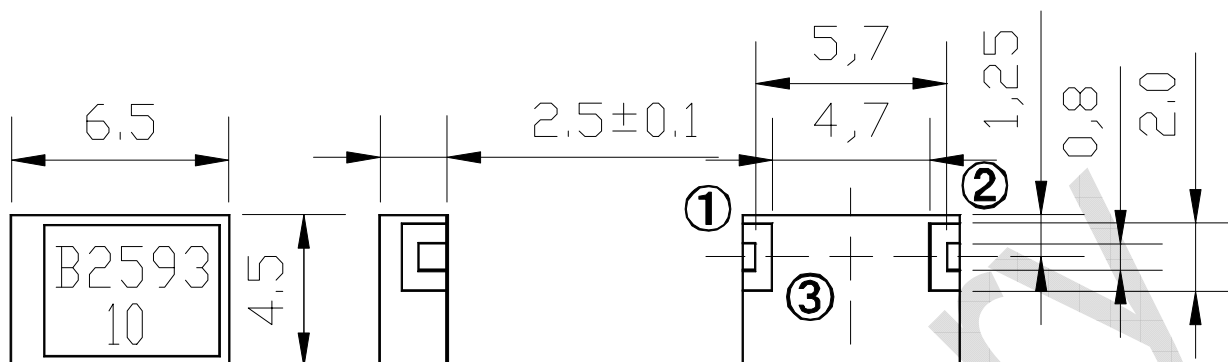

Tolerance : ±0.3
Unit : mm

①	OUT	②	IN
③	GND		

2.Electrical Characteristics

		Specification	(-40~+85°C)
Center Frequency (Fo)	:	2593.0 MHz	
Passband Width	:	Fo± 97.0 MHz	
Passband Insertion Loss	:	2.0 dB	max.
Passband Ripple	:	1.2 dB	max.
Passband V.S.W.R.	:	2.0	max.
Attenuation (absolute value)	:		
at 2275.0 MHz	:	25.0 dB	min.
In/Out Impedance	:	50 Ω	

This filter was measured on a PC board in TOKO standard test jig.
 Test jig loss is not included in IL and Attenuation.

Precaution

Do not connect terminals to DC voltage.

Notice

Note that the contents are subject to change or discontinuation without notice.
 Please request for official specification for approval before using this products.